

Adhesive Bead Check perfectly tailored

VMT SpinTop G2





VMT
Pepperl+Fuchs

SpinTop G2

VMT SpinTop G2 Adhesive Bead Check

NEW VISION MODULE

- Tripled sample rate
- Doubled resolution
- Scan frequency up to 900 Hz
- Dual-color laser for increased robustness with challenging seam colors or backgrounds

NEW

The VMT SpinTop 3D revolutionizes current technical standards and is tailored to the demands of first-class adhesive bead checks. The optimal use of laser technology in conjunction with robust analysis algorithms guarantees reliable quality checking for adhesive beads.

The sensor head, which rotates independently of the glue nozzle, allows the entire adhesive bead process to be measured. The transmission of power and data between the fixed and the rotating part of the sensor head is entirely non-contact and maintenance-free in order to eliminate wear and tear. Measurement distances can be selected on a flexible basis. Cumbersome parameterization and calibration procedures are not required. All measurement results can be documented specifically for each vehicle, and can be visualized on the VMT user interface in a clear and self-explanatory manner.

Highlights

- Direct and earliest possible detection of errors during the glue application process
- No reworking costs due to incorrect glue application in subsequent work steps
- Comprehensive operations checking allows for more precise control over bead volume
- Cycle time savings through inline measurements directly during the glue application
- Simple retrofitting of existing systems; existing system processes remain the same
- Optimum positioning of measurement technology, since the VMT SpinTop 3D is mounted „around“ the glue nozzle
- Minimum mechanical interferences due to the compact design
- Customer specific detailed logging - each individual result can be displayed
- Only trigger commands must be added to existing robot programs

VMT SpinTop G2

Robot-guided or stationary

The VMT SpinTop 3D is mounted directly on the glue gun. The unit can then be guided along the work piece by a robot or it can be used stationary.


Installation on the robot wrist joint is risk-free due to non-contact data and energy transmission. Broken cables or wear and tear of friction rings can be excluded.

The VMT technology package installed on the robot guarantees the exact tracking of the adhesive beads.


Precise glue bead inspection is also possible on a stationary application tower with a VMT SpinTop G2, thanks to the online connection to the robot.

The robot moves the work piece underneath the glue unit. The freely programmable rotation of the sensor unit means that the laser range can always actively follow the application path.

The rotation is controlled directly by the VMT system. No separate set-up of a measuring path is necessary.

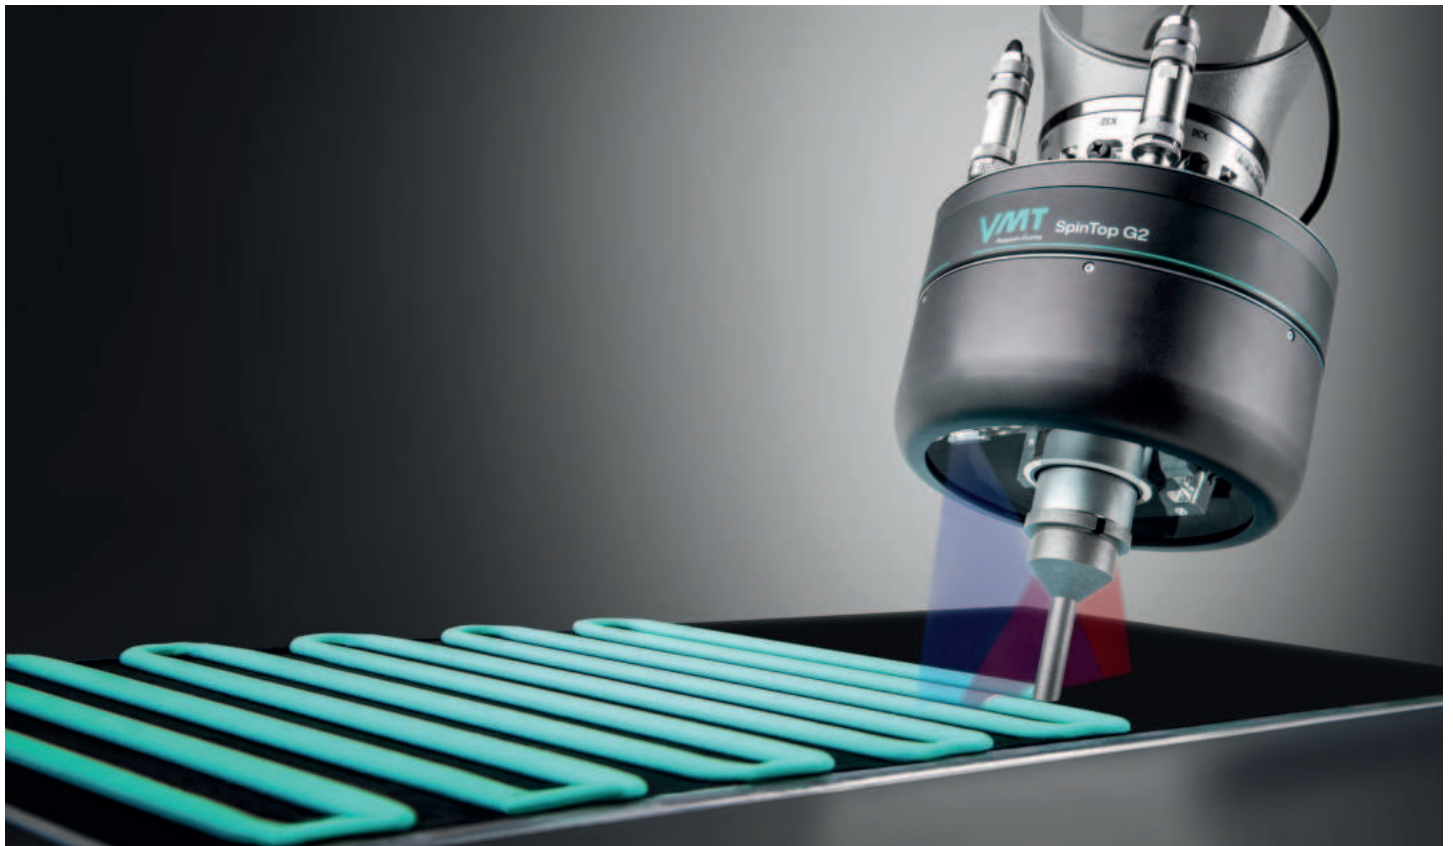

Features and Technical Data

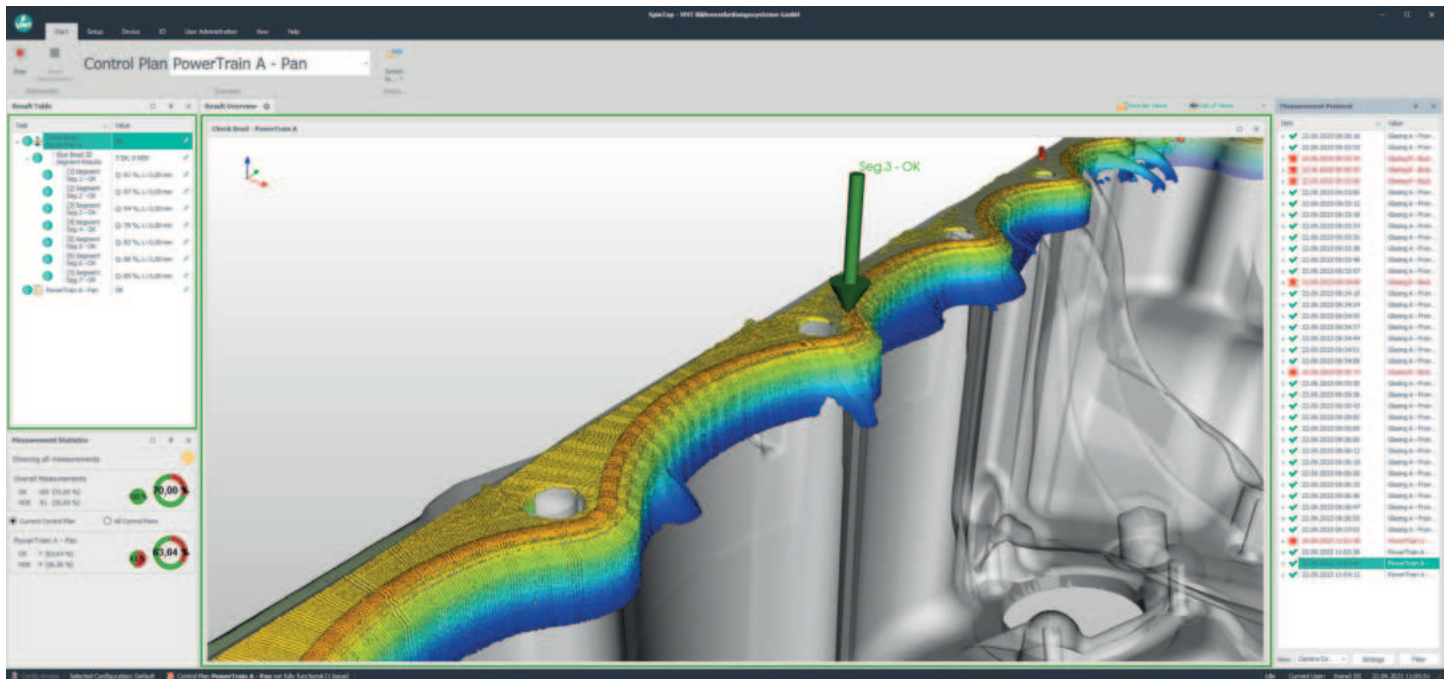

Features

- Full three-dimensional check of adhesive bead with regard to height, width, continuity and geometry
- Online detection is parallel to adhesive bead application
- Resistant to color changes, contrast changes, different surfaces and reflections
- Independent of the glue color (glue can be changed without new sensor parameterization)
- Flexible measurement distances can be set for the respective glue nozzle lengths
- Two user measurement units for optimum capture of 3D geometry
- Tolerances and parameter can be truly set to different sections of the glue bead
- Freely programmable and robot-independent rotation of sensor unit for direct inline measurements
- Separate rotation axis for direct inline measurements
- Non-contact, maintenance-free energy / data transmission
- Technology package for communication with robot
- Minimal set-up required since the rotation of the sensor does not have to be programmed

Technical Data

- Weight approx. 3.8 kg
- Diameter of installation opening 45 mm
- Measurement distance / Measurement range Z = 55 mm ... 255 mm
- Scan frequency up to 900 Hz
- Blue laser (405 nm), red laser (660 nm)
- Protection class 2
- Operating voltage 24 V DC
- Power consumption max. 75 W
- Ambient temperature 0 ... 40 °C
- With heated application nozzle, max. heating temperature 60 °C
- Connections for supply voltage and data transmission per TCP/IP
- Protection type IP40
- Angle of rotation, endless

Solution Excellence for Your Vision

VMT Vision Machine Technic Bildverarbeitungssysteme GmbH is your leading automation partner for machine vision turnkey solutions worldwide. VMT® develops and supplies customized machine vision, robot vision, and laser sensor systems for all industrial sectors using our self-developed state-of-the-art hardware and software products. As a professional consultant, VMT® provides objective solutions tailored to individual applications. Our technical services cover the complete life cycle of your machine vision solution, including planning, commissioning, installation, and system integration as well as training, maintenance, and upgrade services. With more than 25 years of experience in industrial machine vision applications, you can be confident that VMT® will provide proven solutions for your operation that nobody else can match.